


NOTE:
c/w 6-6 3/4" LIFTING ANCHORS FOR HANDLING

PLAN


4 - Ø1" x 48" LONG (25x1219) GALVANIZED GRADE 150 DYWIDAG BOLTS
Ø2" (51) R.P.V.C. CONDUIT

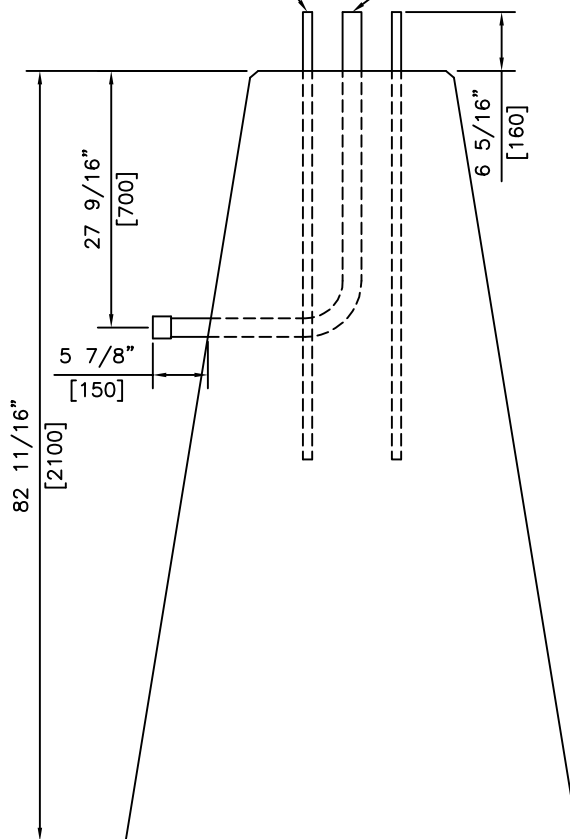

SECTION

NOTES:
1) 30 MPa @ 28 DAYS

REVISED: MAR 15 2010

 <p>KON KAST products (2005) Ltd. "Committed To Quality And Service"</p>	<p>3440 UNIVERSITY WAY KELOWNA B.C. V1V 1V9 PH: (250)765-1423 FX: (250)765-0820</p>	BY: PKR	<p>TYPE 'F2' LIGHT STANDARD BASE</p>	ITEM NO.
		DATE: FEB 28 05		<p>937</p>
		SCALE: NTS		